

Purification and Filtration Solutions



3M™ LifeASSURE™ BNA045 and BNA065 Series Filter Cartridges

Filter cartridges for beverage microbiological stability

LifeASSURE BNA series filter cartridges employ a highly-asymmetric polyethersulfone (PES) membrane that delivers excellent spoilage microorganism retention while greatly minimizing any organoleptic interference. This durable membrane/cartridge design withstands repeated exposure to hot water sanitation and steam sterilization as well as common chemical cleaning and sanitizing agents.

Complementing this high-performance membrane are Advanced Pleat Technology (APT) design and an upstream and downstream support design. All three work in concert to provide an increased flow rate at a lower pressure drop, resulting in smaller filter cartridge assemblies with extended service life and a lower overall operational costs.

Features and benefits

Features	Benefits
Highly asymmetric PES membrane	<ul style="list-style-type: none"> • Longer service life than competitive filter cartridges • Lower operating costs than competitive filter cartridges
High spoilage organism retention	<ul style="list-style-type: none"> • Reliable microbiological control • Performance matched to industry standards
Advanced Pleat Technology (APT)	<ul style="list-style-type: none"> • Increased accessible surface area • Longer service life than competitive filter cartridges • Lower operating costs than competitive filter cartridges
Upstream/downstream supports	<ul style="list-style-type: none"> • Increased flow per cartridge • Reduced housing costs
Broad chemical compatibility	<ul style="list-style-type: none"> • Stable with most cleaning and sanitization regimes
Food contact compliance	<p>Certain 3M LifeASSURE BNA products are compliant with:</p> <ul style="list-style-type: none"> - US FDA 21 CFR, - EU food contact regulation (EC) 1935/2004 - or other food contact regulations <p>Contact your Solventum representative for detailed declaration of compliance information for food contact applications.</p>

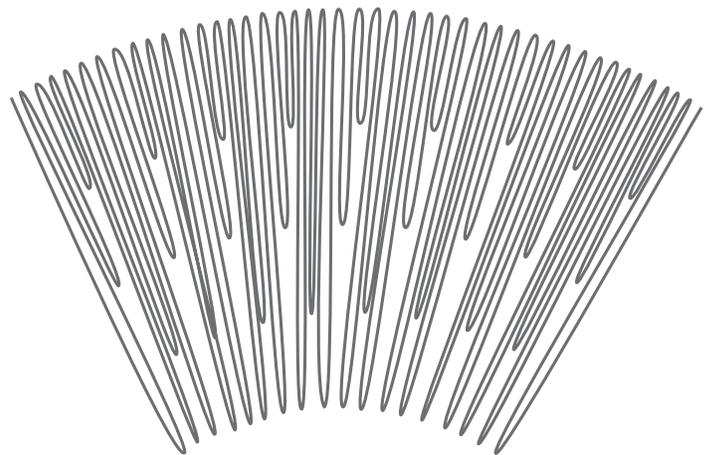


Figure 1. Advanced Pleat Technology


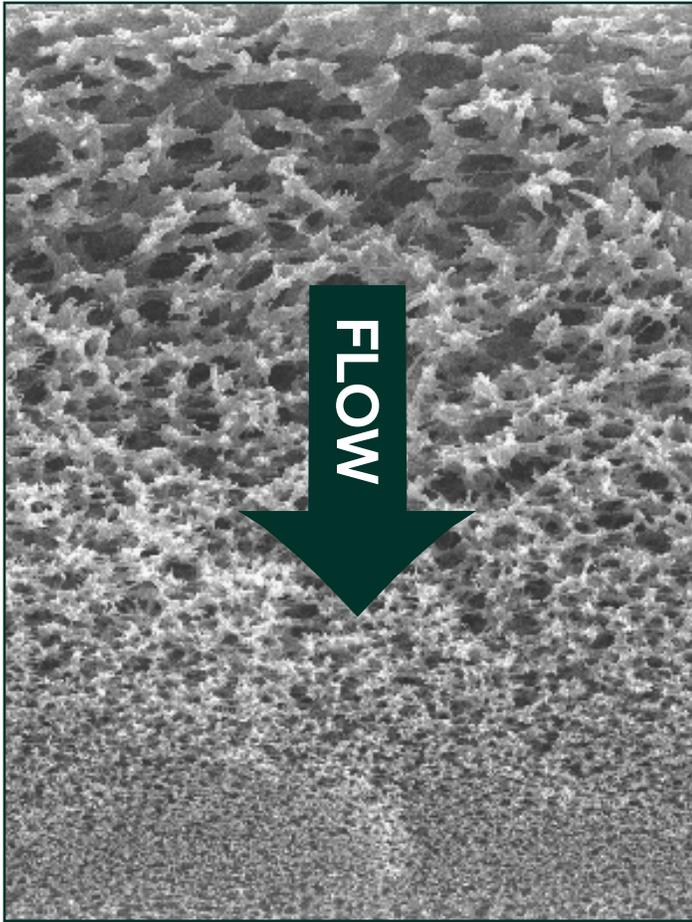


Figure 2. SEM of LifeASSURE BNA series filter cartridge

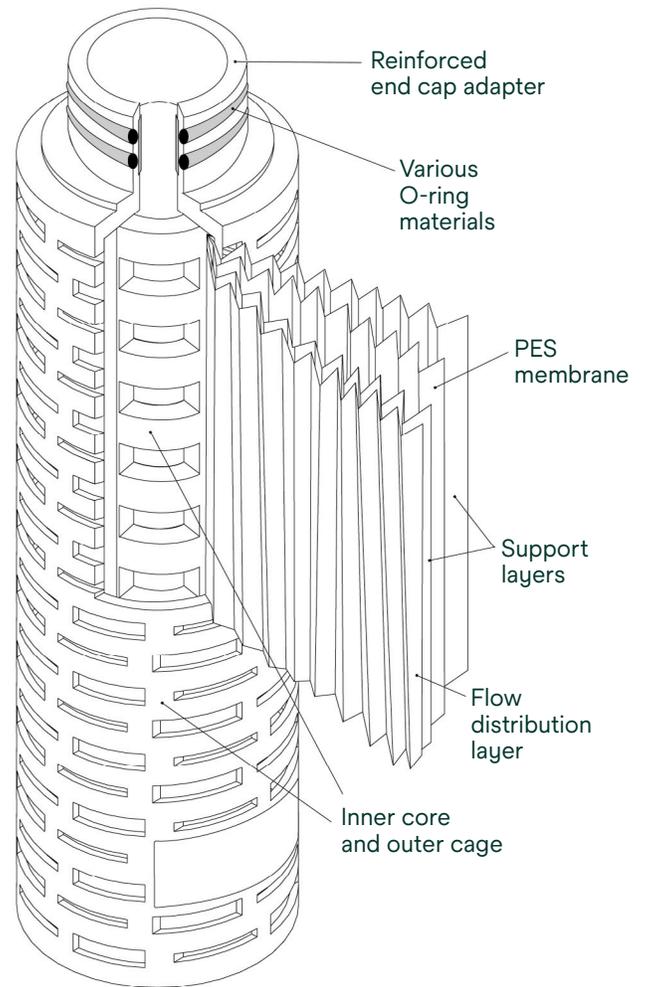

Reliable microbiological control

3M™ LifeASSURE™ BNA 0.45 μm and 0.65 μm rated filter cartridges provide superior retention of common spoilage microorganisms, even at challenge concentrations that far exceed those experienced by most beverage producers (typically 1,000,000 to 10,000,000 cells per cm^2 of membrane area).

Flow distribution layer

Downstream support layer

PES media

Upstream support layer

Figure 3. LifeASSURE BNA series filter cartridge support design

3M™ LifeASSURE™ BNA	Microorganism	Typical Log Reduction Value (LRV)
BNA045	<i>Serratia marcescens</i>	8
BNA045	<i>Oenococcus oeni</i>	9
BNA045	<i>Lactobacillus brevis</i>	10
BNA045	<i>Dekkera intermedia</i>	9
BNA065	<i>Lactobacillus brevis</i>	7
BNA065	<i>Dekkera intermedia</i>	9

Log Reduction Values are calculated using the following formula:

$$LRV = \log_{10} \left(\frac{\text{total number of organisms entering the filter cartridge}}{\text{total number of organisms exiting the filter cartridge}} \right)$$

Fast flow rates at low pressure drops

Solventum has combined three key technological advances to provide the fastest flow rate per unit of pressure drop. These three technologies, a highly asymmetric microporous membrane, Advanced Pleat Technology (APT) design, and an upstream and downstream support design, afford users with faster process flow rates using fewer filter cartridges.

Durable design

The LifeASSURE BNA series filter membrane and filter cartridge design innovations result in a durable filter cartridge, capable of secure operation through numerous cycles of hot water sanitization, steam sterilization, and chemical based cleaning and sanitization.

LifeASSURE BNA series filter cartridge construction

LifeASSURE BNA series filter cartridges are constructed of single-layer, highly asymmetric, polyethersulfone (PES) microporous membrane pleated with polypropylene upstream and downstream support materials. The outer cage, inner core and reinforced end-cap adapters are made of polypropylene. Multiple length filter cartridges, with industry standard connection styles, are produced to fit the most widely used housing designs and system sizes. No resin or binder compounds are added. All materials used in manufacturing are traceable and are approved for indirect food contact. Filter cartridges are manufactured under an ISO 9001:2015 certified quality system using the most advanced thermoplastic welding techniques for filter cartridge integrity. LifeASSURE BNA series filter cartridges are 100% integrity tested after manufacture to verify quality.

Materials of construction

Membrane	Polyethersulfone
Support layers	Polypropylene
Inner core, outer cage, end caps	Polypropylene
End cap adapter	Polypropylene with polysulfone or stainless steel reinforcing ring
O-rings	Various

3M™ LifeASSURE™ BNA045 and BNA065 Series Filter Cartridges

Nominal filter cartridge dimensions	
Effective Filtration Area (EFA)	8.5 ft ² (0.79 m ²)
Filter cartridge diameter	2.75" (70 mm)
Filter cartridge lengths	10" (254 mm), 20" (508 mm), 30" (762 mm), 40" (1016 mm)

Operating parameters	
Recommended flow rate (10" element)	Wine: 2 – 3 gpm (7.6 – 11.4 lpm) Maximum: 9 gpm (34 lpm)
Max. differential pressure (forward)	80 psid @ 77°F (5.5 bar @ 25°C) 35 psid @ 194°F (2.4 bar @ 90°C)
Max. differential pressure (reverse)	50 psid @ 77°F (3.4 bar @ 25°C)
Max. hot water sanitization temperature	194°F (90°C) – 150, 30 minute cycles
Max. steam sterilization temperature	275°F (135°C) – 75, 30 minute cycles
NaOH cleaning duration (conc. 1M @ 65°C)	100 hours
Peracetic acid sanitation (conc. 1% @ 21°C)	100 hours

	BNA045 (0.45 µm)	BNA065 (0.65 µm)
Forward flow test pressure	22 psi (1.5 bar)	15 psi (1 bar)
Max. diffusion (10" element)	≤35 cc/min	≤25 cc/min
Minimum bubble point	≥24 psi (1.7 bar)	≥17 psi (1.2 bar)
Pressure hold test	Consult Solventum	Consult Solventum

Integrity testing parameters

The Integrity Test is a non-destructive test that can be performed by the user to make sure the filter cartridge is installed correctly and ready for operation. LifeASSURE BNA series filter cartridges can be Integrity Tested either manually, or with an automated integrity tester, by one of three methods: the Forward Flow Test, the Bubble Point Test, or the Pressure Hold Test. Refer to Technical Brief 70-2016-0416-5 for additional information on integrity testing parameters and specifications. Refer to Technical Brief 70-2016-0417-3 for additional information on cleaning, sanitization, sterilizing parameters, and specifications.

Solventum filter cartridge housings

A specialized range of filter housings are available to meet the needs of the food and beverage industry. The housings provide easy access for filter cartridge change-out and confidence that LifeASSURE BNA series filter cartridges are sealed securely to avoid the possibility of fluid bypass. All housings are constructed using 316L stainless steel to maximize corrosion resistance. Solventum also offers custom-design, fully automated filtration skids and mobile units.

Ordering guide

3M™ LifeASSURE™ BNA Series Filter Cartridge ordering guide

Cartridge grade	Removal rating (µm)	Configuration	Length (inches)	End-modification	Gasket/O-ring material	Adaptor insert
BNA	045 – 0.45 065 – 0.65	F – APT Pleat	01 – 10 02 – 20 03 – 30 04 – 40	B – 226 O-ring and spear C – 222 O-ring and spear F – 222 O-ring and spear	A – Silicone C – EPR	2 – SS insert

Example: The part number for a 30 inch LifeASSURE BNA series filter cartridge, 0.45 µm retention rating, 226 silicone O-ring connector with locating spear, SS insert, would be: BNA045F03BA2.

Please note: The ordering guide above is for reference only. Not all combinations are available.

Please consult with your Solventum representative to determine the appropriate part number for your application.

Intended Use: LifeASSURE BNA series products are intended for use in industrial and food and beverage filtration applications of aqueous and non-aqueous fluids in accordance with the product instructions, specifications and where materials of construction are compatible. Certain LifeASSURE BNA products are compliant for use in Food and Beverage applications. For specific details regarding use or limitations for food contact applications please contact your Solventum representative for more information. Since there are many factors that can affect a product's use, the customer and user remain responsible for determining whether the Solventum product is suitable and appropriate for the user's specific application, including user risk assessments and evaluation of the Solventum product in the user's application.

Restrictions on Use: Solventum advises against the use of these Solventum products in any application other than the stated intended use(s), since other applications have not been evaluated by Solventum and may result in an unsafe or unintended condition. Do not use in any manner whereby the Solventum product, or any extractable or leachable from the Solventum product, may become part of or remains in a medical device, drug, cosmetic, supplement, infant formula; or in applications involving life-sustaining medical applications or prolonged contact with internal bodily fluids or tissues.

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by Solventum are based upon records by Solventum are based upon records, tests, or experience that Solventum believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgement to the information. No license under any Solventum or third-party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond Solventum's control and uniquely within user's knowledge and control can affect the use and performance of a Solventum product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a Solventum product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is expressly identified on the applicable Solventum product literature or packaging (in which case such express warranty governs), Solventum warrants that each Solventum product meets the applicable Solventum product specification at the time Solventum ships the product. SOLVENTUM MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a Solventum product does not conform to this warranty, then the sole and exclusive remedy is, at Solventum's option, replacement of the Solventum product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, Solventum will not be liable for any loss or damage arising from or related to the Solventum product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



Solventum Corporation
2510 Conway Avenue East
St. Paul, MN 55144-1000

Phone 1-800-243-6894
1-203-237-5541
Web Solventum.com

3M Purification is now part of Solventum

© Solventum 2025. Solventum, the S logo and LifeASSURE are trademarks of Solventum or its affiliates. 3M, and the 3M logo are trademarks of 3M. Other trademarks are the property of their respective owners. 70020188788 REV 224hb